





The new ELIA Range introduced by GEWISS is the solution for conventional relamping with LED technology without issues or additional cost. LED luminaire with increased impact resistance for multiple industrial lighting applications with low mounting heights also where damp and dust protection are necessary. Extruded polycarbonate profile, with UV filter, the screen is in opal PC to ensure an optimal light distribution.

Insulation class	I	IP degree	IP66
Lamp	LED	Shock resistance	IK08
Type	Stand alone	Voltage	220/240 V - 50/60 Hz - Stand alone
Shield type	Opal	Weight (kg)	1.7
Series	Elia	Application	Internal
Length	1200 mm	Glow Wire Test	850 °C
System power	37 W	Lumen output (lm)	4500
Colour temperature	4000 K (CRI 80)	Warranty	5 years
Operating temperature	-25 +40 °C	Driver type	Constant Current Driver Led
Efficiency class of integrated LEDs	A ÷ A++	Type of light source	LED - Not replaceable
Device with reduced surface temperature	Complying	LED Life Time (L80B50)	54000 h

DIMENSIONAL



PHOTOMETRIC DISTRIBUTION

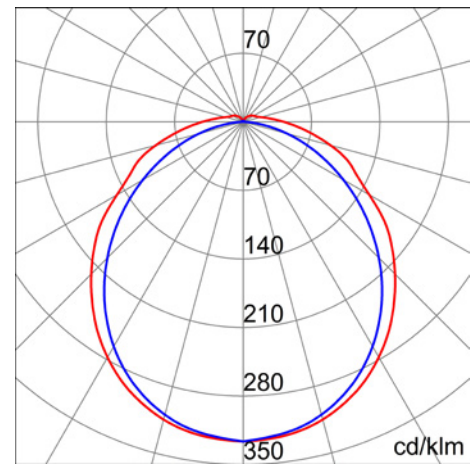

TECHNICAL SYMBOLOGY



GWT
850°C

CONSTANT
CURRENT
DRIVER



IP
66

IK
08



STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 25/02/2019

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice