





The new ELIA Range introduced by GEWISS is the solution for conventional relamping with LED technology without issues or additional cost. LED luminaire with increased impact resistance for multiple industrial lighting applications with low mounting heights also where damp and dust protection are necessary. Extruded polycarbonate profile, with UV filter, the screen is in opal PC to ensure an optimal light distribution.

| | | | |
|---|-----------------|------------------------|------------------------------------|
| Insulation class | I | IP degree | IP66 |
| Lamp | LED | Shock resistance | IK08 |
| Type | Stand alone | Voltage | 220/240 V - 50/60 Hz - Stand alone |
| Shield type | Opal | Weight (kg) | 2 |
| Series | Elia | Application | Internal |
| Length | 1500 mm | Glow Wire Test | 850 °C |
| System power | 47 W | Lumen output (lm) | 5700 |
| Colour temperature | 4000 K (CRI 80) | Warranty | 5 years |
| Operating temperature | -25 +40 °C | Driver type | Constant Current Driver Led |
| Efficiency class of integrated LEDs | A ÷ A++ | Type of light source | LED - Not replaceable |
| Device with reduced surface temperature | Complying | LED Life Time (L80B50) | 54000 h |

DIMENSIONAL



PHOTOMETRIC DISTRIBUTION

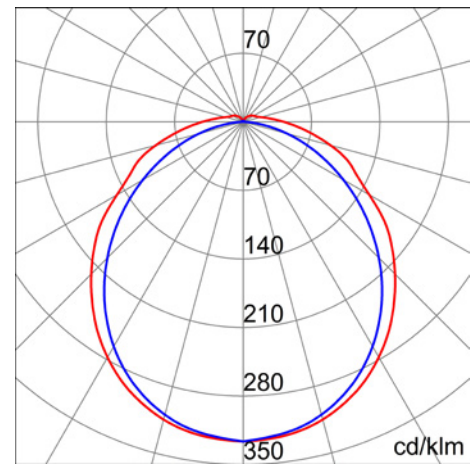

TECHNICAL SYMBOLOGY



GWT
850°C

CONSTANT
CURRENT
DRIVER



IP
66

IK
08



STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 25/02/2019

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice