





The new ELIA Range introduced by GEWISS is the solution for conventional relamping with LED technology without issues or additional cost. LED luminaire with increased impact resistance for multiple industrial lighting applications with low mounting heights also where damp and dust protection are necessary. Extruded polycarbonate profile, with UV filter, the screen is in opal PC to ensure an optimal light distribution.

Insulation class	I	IP degree	IP66
Lamp	LED	Shock resistance	IK08
Type	Stand alone	Voltage	220/240 V - 50/60 Hz - Stand alone
Shield type	Opal with feed-through wiring	Weight (kg)	1.7
Series	Elia	Application	Internal
Length	1200 mm	Glow Wire Test	850 °C
System power	37 W	Lumen output (lm)	4500
Colour temperature	4000 K (CRI 80)	Warranty	5 years
Operating temperature	-25 +40 °C	Driver type	Constant Current Driver Led
Efficiency class of integrated LEDs	A ÷ A++	Type of light source	LED - Not replaceable
Device with reduced surface temperature	Complying	LED Life Time (L80B50)	54000 h

### DIMENSIONAL



### PHOTOMETRIC DISTRIBUTION

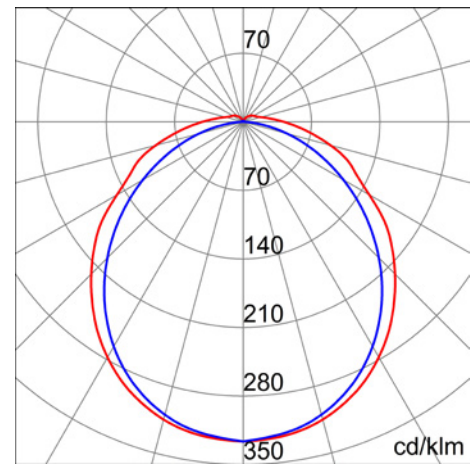

### TECHNICAL SYMBOLOGY



GWT  
850°C

CONSTANT  
CURRENT  
DRIVER



IP  
66

IK  
08



### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 25/02/2019

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice